
# ISUZU

### M 55 Série Bleu OBD-D (5,5 ton)

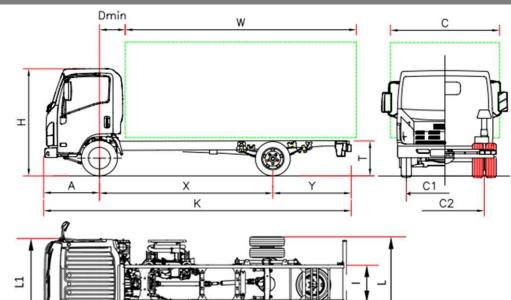

### € 37.770 VAT excluded

C OTTIT	0 17 11 071010	laca		
M 55		M55 E	M55 F	M55 H
Wheelbase	Х	2500 <sup>(5)</sup>	2750	3350
Overall length	К	5045	5295	6020
Body lenght min. <sup>(1)</sup>	W	3285	3535	4260
Body lenght Max. (1)	W	3475	3820	4490
Rear overhang	Y	1435	1435	1560
Chassis height	Т	740	740	735
Overall height	Н	2150	2150	2160
Rear axle width	L	1865		
Cab width <sup>(2)</sup>	L1	1815		
Body width <sup>(3)</sup>	С	2120		
Front axle to back of cab	D min	650		
Front overhang	А	1110		
Frame internal size	I	700		
Front track	C1	1475		
Rear track	C2	1425		
Minimum Road Clearance	-	190		
Turning diameter (m) (4)	-	10,4	11,3	13,5
N	VEIGHT (kg)			
Unladen weight <sup>(6)</sup>		2310	2310	2370
Unladen weight front axle		1615/695	1615/695	1640/730
Gross Vehicle Weight (GVW)		5500		
Front/rear total weight		2100 / 3980		
Max trailer weight unbraked/Max trailer weight braked		750 / 3500		
1. The length of the body refers to a uniformly loaded vehicle, up to the ma	ximum capacity on each axl	e (dimensions declared in	C.O.C. with no chassis mo	difications)

The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications). Excluding turn signal and side mirrors

1. 2. 3. 4. 5.

Excluding turn signal and side mirrors Possible widths with optional mirror backets 1865/1945 – 1945/2120 – 2120/2275 Curb to curb turning diameter Wheelbase modified (see thw optional equipment) The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES + 35 Kg (25/10).

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDI Europe can be considered responsible if any of this information is incorrect.

## $M\ 55$ - Wheelbase (mm) E 2500 - F 2750 - H 3350

#### FEBRUARY 2021

### € 37.770 <sup>(\*\*</sup>

EBRUARY 2021		€ 37.770 (		
	NEES 2	€ 1290 (**)		
Equipment	Right-hand drive (Wheelbase E/F NEES 2) (*)	€ 1182 (**)		
	(*)according to availability	(**) VAT excluded		
Standard features				
<ul> <li>EGR - DPD – SCR</li> <li>MID display</li> <li>Engine exhaust brake</li> <li>Side mirrors heated and electric</li> <li>Immobilizer</li> </ul>	<ul> <li>Power operated windows</li> <li>Suspended seat</li> <li>Fog lamps Fr and Rr</li> <li>Reverse warning buzzer</li> <li>Radio DAB+ with USB</li> <li>Central locking with remote control</li> </ul>	<ul> <li>Head lamps control levelling</li> <li>Day-time running lights</li> <li>Steering adjustable (tilting and height)</li> <li>Speed limiter (90km/h)</li> </ul>		
	Air conditioning	€ 1089 (**)		
Optional	Wheelbase modified	Ask to your dealer		
	Body builder Controller	€ 354 (**)		
	Variable-geometry turbocharger DISPLACEMENT 2999 cm <sup>3</sup> POWER 110kW (150 hp) 2800 rpm TORQUE 375 Nm 1600 – 2800 rpm EMISSIONS REGULATIONS EURO VI OBD-D.			
Safety systems	ABS ESC (Electronic Stability Control) with LDWS AEBS SRS Driver Airbag			
Tank	68 L Wheelbase E - F – 93 L Wheelbase H	16 L Ad-Blue <sup>®</sup>		
Gearbox and Final drive ratio	5 gear MYY5A – 5.315 - 2.908 - 1.558 - 1.000 - 0.721; Reverse 5.068; Final gear ratio 4.300 (43/10)			
Transmission control		NEES 2		
Dimensions of the chassis	Width 65 mm, Height 180 mm, Thickness 4 mm			
Number of seats	3			
Axle	2 the rear one with twin wheels.			
Tires	Front 205/75 R16C simple. Rear 205/75 R16C dual.			
Brakes	Front and rear: ventilated discs with asbestos-free linings. Hydraulic system, with vacuum brake booster EEC standards with ABS, independent circuits on both axles. Drum parking brake on the transmission shaft.			
Suspensions	Front and rear: Multi semi elliptical alloy steel leaf spring. Hydraulic double acting shock absorbers.			
	Nominal voltage 24V - Generator 90A - 2 x Battery 70Ah			

N.B.: Technical and specification data are given as guide only and they can be modified at any time with no prior warning. Nor the constructor neither MIDI Europe can be considered responsible if any of this information is incorrect.