


Suspensions mechanic Série Bleu OBD-D

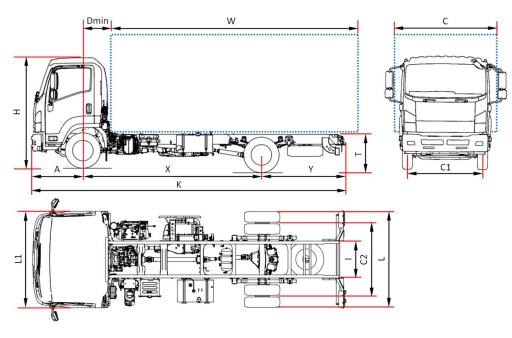

€ 56.116 VAT excluded				
F 11		F 11 H		
Wheelbase	Х	3410		
Overall length	K	6010		
Body lenght min. (1)	W	4130		
Body lenght Max. (1)	W	4480		
Rear overhang	Υ	1430		
Chassis height	Т	875		
Overall height	Н	2565		
Rear axle width	L	2170 (2220 mm rear light width)		
Cab width ⁽²⁾	L1	2195		
Body width ⁽³⁾	С	2550		
Front axle to back of cab	D min	710		
Front overhang	Α	1170		
Frame internal size	1	840		
Front track	C1	1795		
Rear track	C2	1660		
Minimum Road Clearance	-	185		
Turning diameter (m) ⁽⁴⁾		11,1		
WEIGHT (kg)				
Unladen weight ⁽⁵⁾		3640		
Unladen weight front axle		2375/1265		
Gross Vehicle Weight (GVW)		11000		
Front/rear total weight		4000 / 7600		
Max trailer weight unbraked/Max trailer weight braked		750 / 3500		

- The length of the body refers to a uniformly loaded vehicle, up to the maximum capacity on each axle (dimensions declared in C.O.C. with no chassis modifications). Excluding turn signal and side mirrors

 Possible widths with optional mirror brackets 2220/2286 2286/2406 2406/2500 2500/2550

- Curb to curb turning diameter
 The Unladen weight include spare wheel, full fuel tank and driver, optional excluded. NEES +30 kg

$F\ 11$ - Wheelbase (mm) H 3410

FEBRUARY 2021 € **56.116** (**)

Equipment	NEES 2 + HSA	€1800 ^(**)	
		(**)VAT excluded	
Standard features			
 EGR - DPD - SCR MID display Speed limiter (90km/h) Rear lock differential Engine exhaust brake Steering adjustable (tilting and height) 	 Air conditioning Air spring seat Power operated windows Side mirrors heated and electric Reverse warning buzzer Radio DAB+ with USB 	 Head lamps control levelling Immobilizer Central locking with remote control Cruise control Day-time running lights Fog lamps Fr and Rr 	
Optional	Body builder Controller	€ 354 (**)	
Engine	ISUZU 4HK1E6H Diesel Engine 4 cylinders. common rail direct-injection intercooler with Twin-Turbocharger, additional injector on exhaust pipe. DISPLACEMENT 5193 cm³ POWER 177kW (240 hp) 2400 rpm TORQUE 765 Nm 1600 rpm EMISSIONS REGULATIONS EURO VI OBD-D.		
Safety systems	ABS ESC (Electronic Stability Control) with ASR LDWS AEBS SRS Driver Airbag		
Tank	140 L	16 L Ad-Blue®	
Gearbox and Final drive ratio	6 gear MZW6P – 6.615 - 4.095 - 2.358 - 1.531 - 1.000 - 0.722; Reverse 6.615; Final gear ratio 4.333 (39/9)		
Transmission control	Manual	NEES 2 + Kick down	
Dimensions of the chassis	Width 60 mm, Height 225 mm (only W/B H height minimum 124,6 mm) Thickness 6 mm		
Number of seats	3		
Axle	2 the rear one with twin wheels.		
Tires	Front 235/75 R17,5C simple. Rear 235/75 R17,5C dual.		
Brakes	Front and rear: drum brake. Wheel parking brake: rear, air control. Brake type: air over hydraulic dual circuit.		
Suspensions	Front and rear: Multi taper leaf spring. Front and rear stabilizer shaft		
Electric system	2 battery 110 A - System 24V - Gene	rator 90A	